





3/18 図3


(C)
















(A)


(B)








(C)


(D)







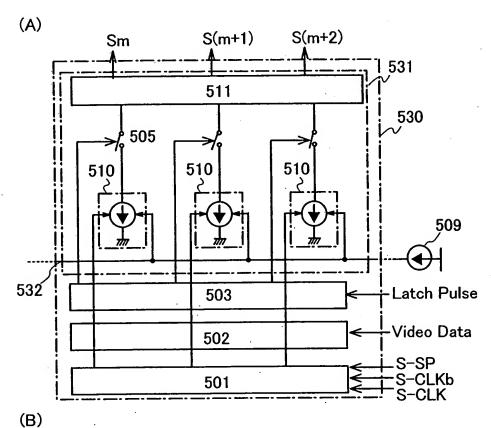


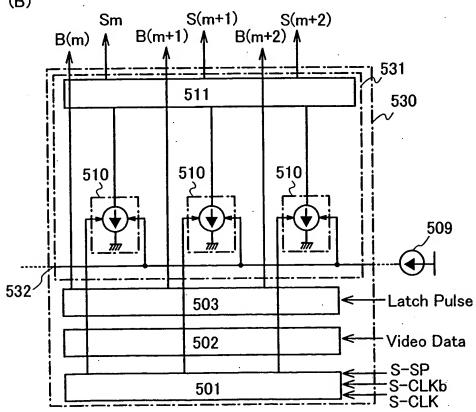


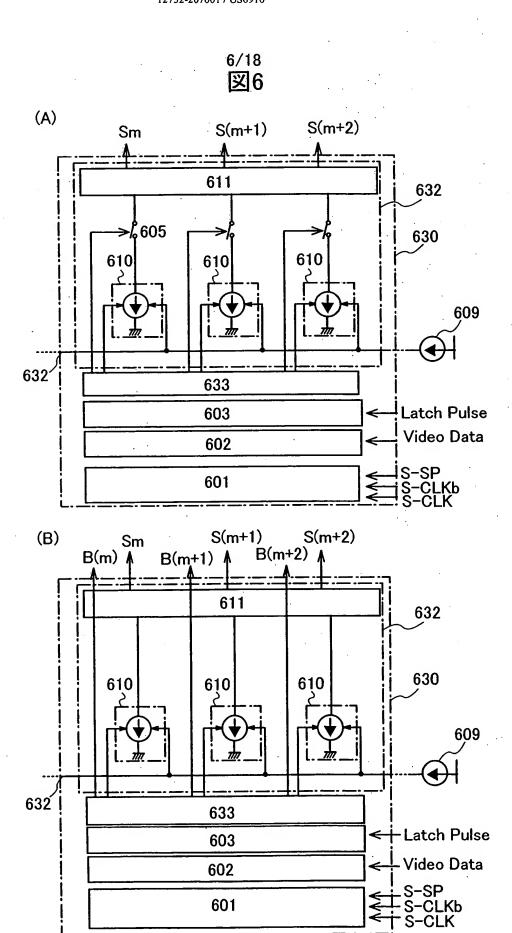


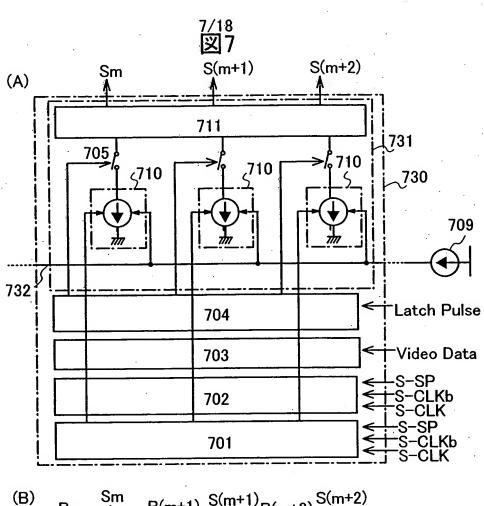

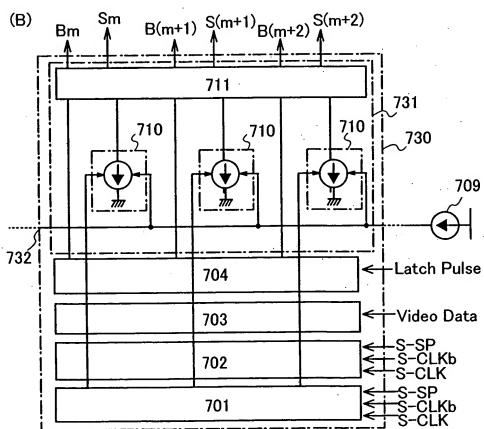


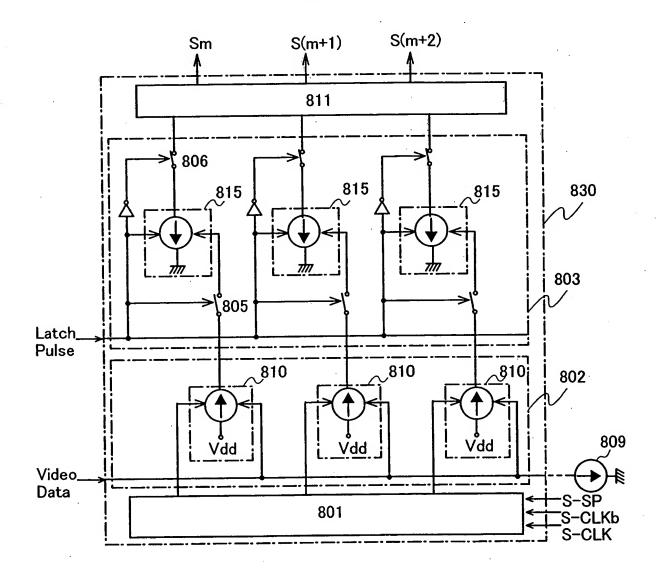

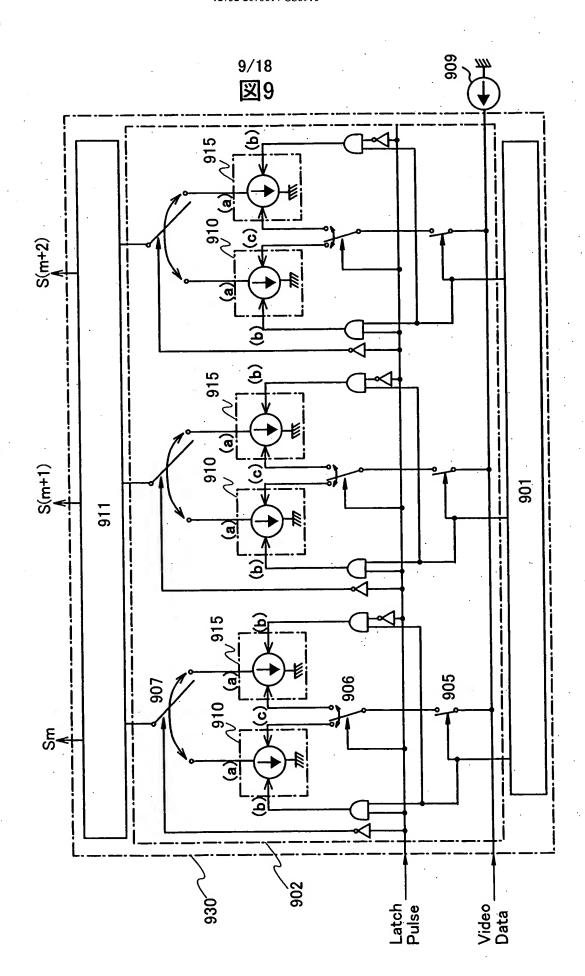


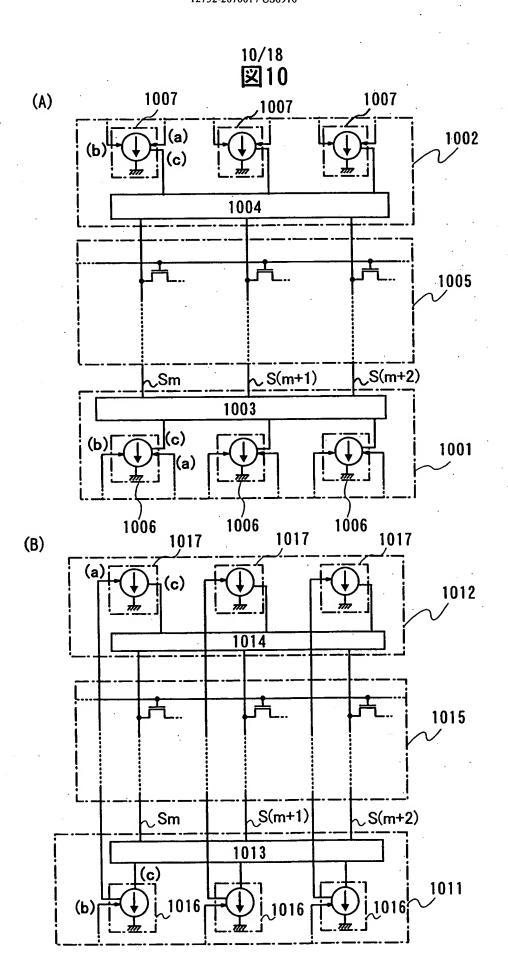


11/18 **図11**

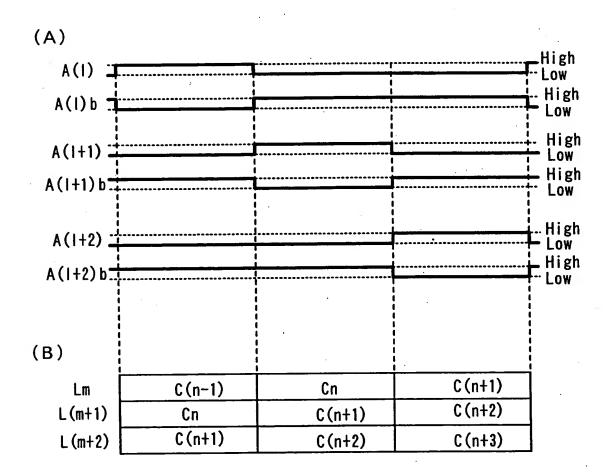



12/18 図**12**

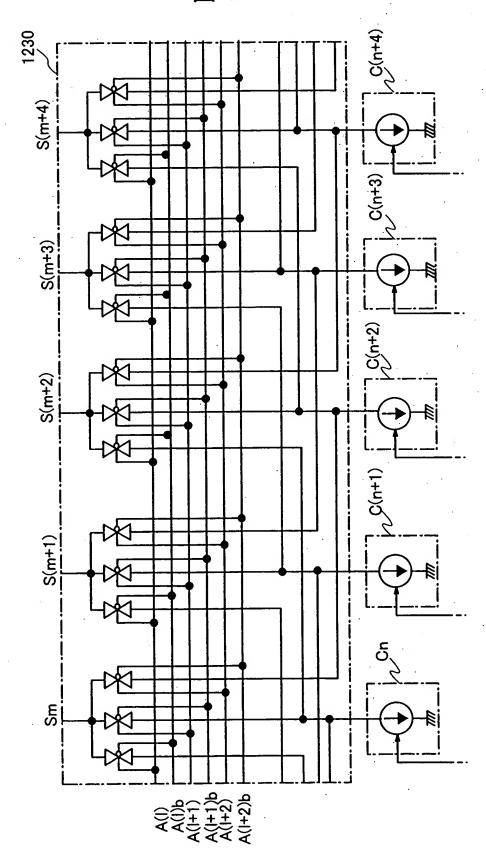


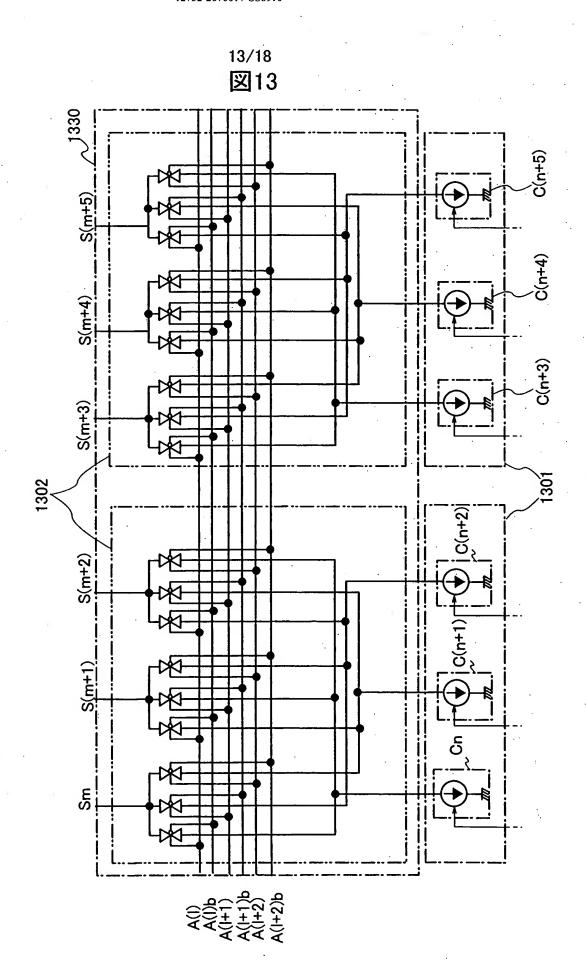

14/18 **図14**

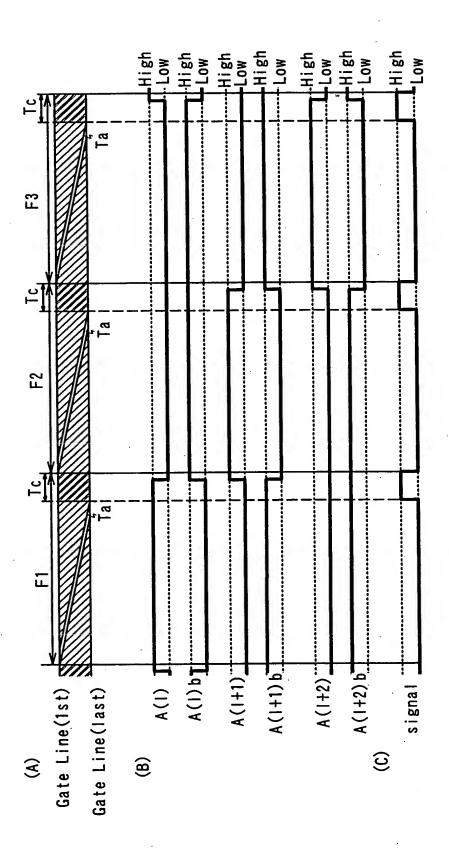


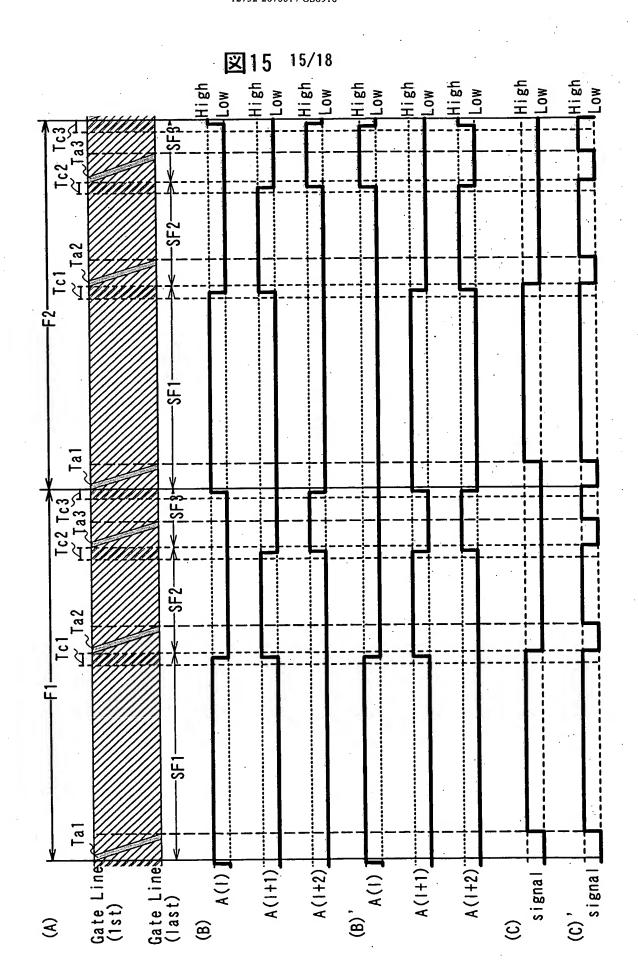

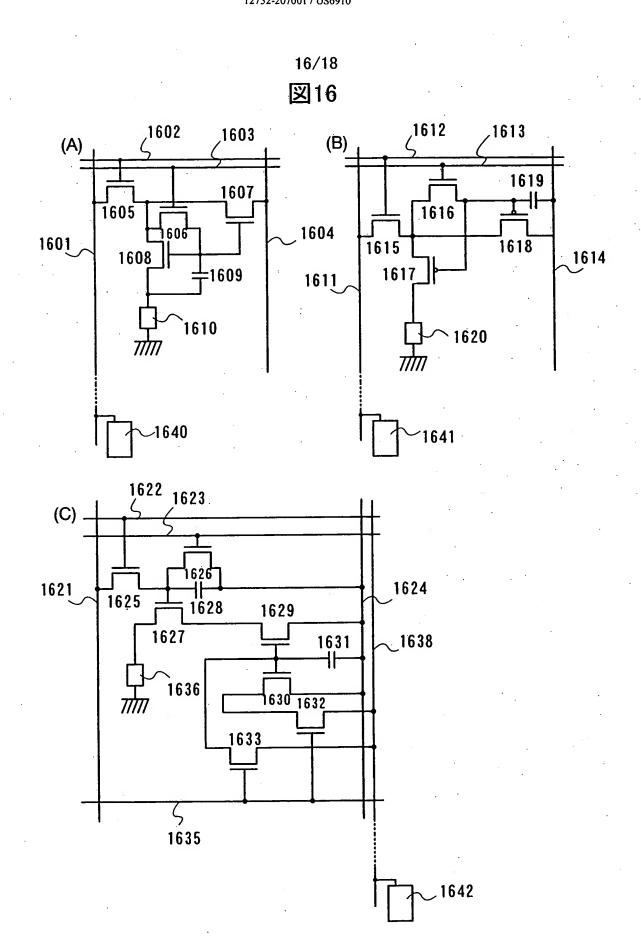

Page 17 of 18
A CURRENT SOURCE CIRCUIT, A SIGNAL LINE DRIVER CIRCUIT AND A DRIVING METHOD THEREOF AND A LIGHT EMITTING DEVICE Hajime Kimura et al. 12732-207001 / US6910

17/18 図**17**

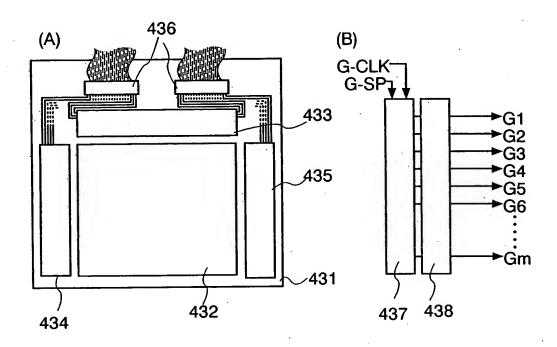

18/18 **図18**

